


TECHNICAL DATA SHEET

SAB-PZ 40/300

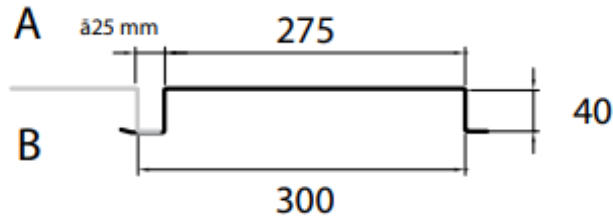

Gauge	Weight
0,75 mm	8,18 kg/m ²
0,88 mm	9,59 kg/m ²

STEEL GRADE

Minimal S-320 GD+Z / ZM / ZA / AZ

SUSTAINABILITY

Environmentally relevant product information (EPD) are published on www.sabprofil.com.

QUALITY CONTROLE

We guarantee that the product has been produced according the valid standards and directives

REACTION TO FIRE

Incombustible, class A1 according to EN 13501-1 for coating systems unto 65 µm

SPANS

SAB advices for an as flat as possible façade a maximum load span of 2000 mm. This load span is valid in all wind areas, vacant and till a construction height of 15 m.

Recommended maximum length 7 m.

STANDARDS

Production according ISO 9001, ISO 14001 and BES 6001

Tolerances according PPA-Europe Quality Regulations

Steel grade according EN 10346

IJsselstein, April 2024