


TECHNICAL DATA SHEET

SAB 106R+/750

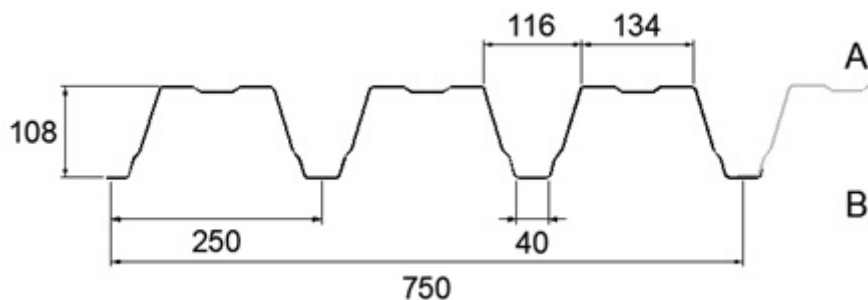

Gauge	Weight
0,75 mm	9,81 kg/m ²
0,88 mm	11,51 kg/m ²
1,00 mm	13,08 kg/m ²
1,25 mm	16,35 kg/m ²

STEEL GRADE

Yield strength minimum 320 N/mm², zinc layer can be Z, AZ, ZA or ZM.

SUSTAINABILITY

Environmentally relevant product information (EPD) are published on www.sabprofil.com

QUALITY CONTROLE

We guarantee that the product has been produced according to the valid standards and directives

REACTION TO FIRE

Incombustible, class A1 according to EN 13501-1 for coating systems up to 65 µm

SPANS

Depend on wind loads, deflection limitations and safety factors.

See our SAB-brochure for more information

STANDARDS

Production according to ISO 9001, ISO 14001, ISO 45001 and BES 6001

CE-marking and Declaration of Performance according to EN 1090

Tolerances according to PPA-Europe Quality Regulations

Steel thickness: EN 10143 is used as a basis for the gauge tolerances, applied to the steel core only and excluding zinc layer and organic coating.

IJsselstein, June 2025