


## TECHNICAL DATA SHEET

### SAB 18/988

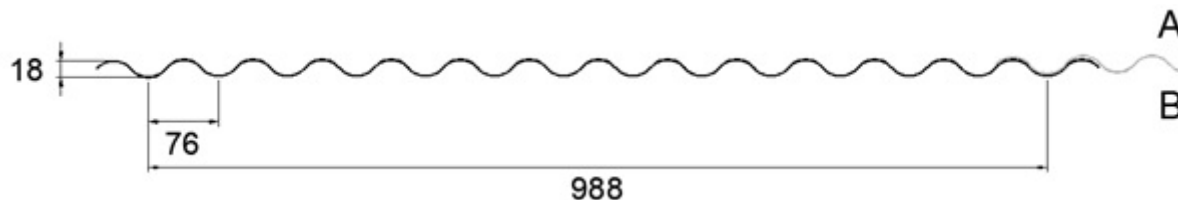

Gauge	Weight
0,63 mm	6,26 kg/m <sup>2</sup>
0,75 mm	7,45 kg/m <sup>2</sup>
0,88 mm	8,74 kg/m <sup>2</sup>
1,00 mm	9,93 kg/m <sup>2</sup>
1,25 mm	12,41 kg/m <sup>2</sup>

#### STEEL GRADE

Yield strength minimum 280 N/mm<sup>2</sup>, zinc layer can be Z, AZ, ZA or ZM.

#### SUSTAINABILITY

Environmentally relevant product information (EPD) are published on [www.sabprofil.com](http://www.sabprofil.com).

#### QUALITY CONTROLE

We guarantee that the product has been produced according the valid standards and directives

#### REACTION TO FIRE

Incombustible, class A1 according to EN 13501-1 for coating systems unto 65 µm

#### SPANS

Depend on wind loads, deflection limitations and safety factors.

See our SAB-brochure for more information

#### NORMEN

Production according ISO 9001, ISO 14001, ISO 45001 en BES 6001

CE-marking and Declaration of Performance according EN 1090

Tolerances according PPA-Europe Quality Regulations

Steel thickness: EN 10143 is used as a basis for the gauge tolerances, applied to the steel core only and excluding zinc layer and organic coating.

IJsselstein, January 2026